


TILEGUARD MEMBRANE  
 APPLIED TO SUBSTRATE  
 PREPARED WITH 650 LT  
 LIQUID ADHESIVE OR  
 CALIFORNIA SEALANT AT  
 A RATE OF 250 - 300  
 SF/GAL OR 650 WB LIQUID  
 ADHESIVE AT A RATE OF  
 350 - 400 SF/GAL

PREPARED SUBSTRATE -  
 BY OTHERS

TILE - BY OTHERS

GROUT BED - BY OTHERS

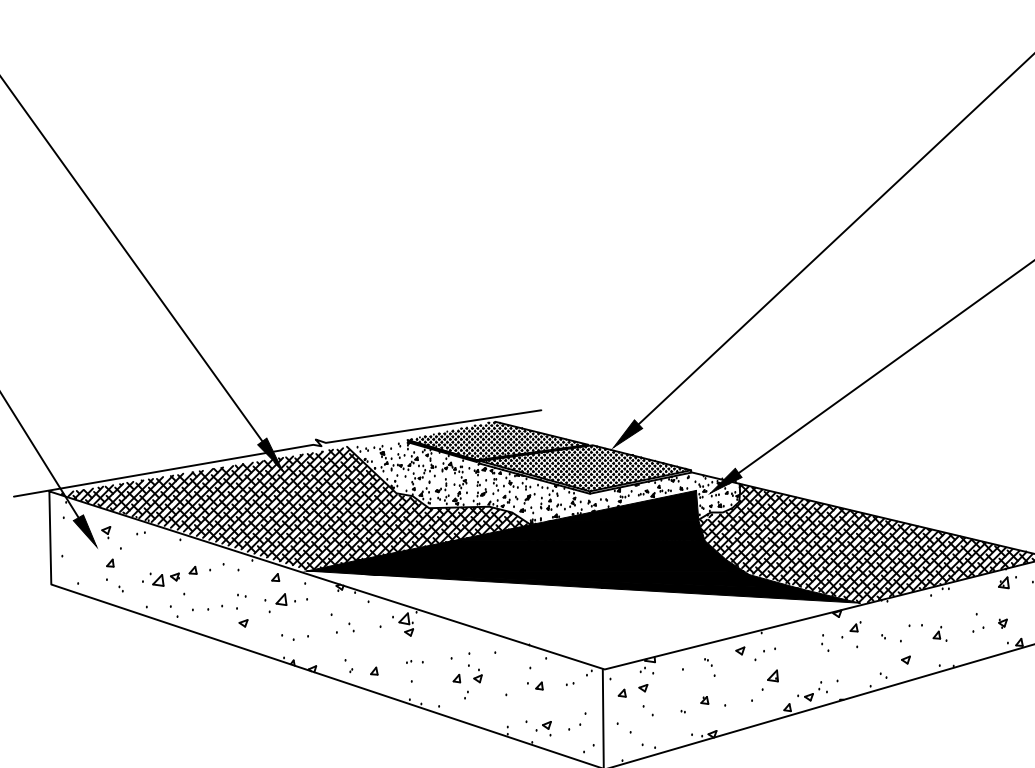

**TG1**

**SECTION@ TILEGUARD ANTIFRACTURE NON-WATERPROOF DETAIL**

**SPECIAL NOTE: IF ADHESIVE IS REQUIRED FOR SEAMS OR ENDLAPS DO NOT USE 650 WB LIQUID ADHESIVE**

© POLYGUARD PRODUCTS, INC.  
 MATERIALS SEPARATED FOR CLARITY

<small>The information provided is based on data and knowledge considered to be true and accurate and is offered for the users' consideration, investigation and verification, but we do not warrant the results to be obtained. Please read all data sheets, statements, recommendations or suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us.</small>	NOT TO SCALE
	EFFECTIVE DATE: 03/23/2020
	SUPERCEDES: 07/01/2019