


LM-95 LIQUID MEMBRANE OR  
DETAIL SEALANT PW APPLIED TO  
CUT EDGE AND TERMINATIONS  
OF PRM

12" STRIP OF DETAIL TAPE APPLIED TO  
INSIDE AND OUTSIDE CORNERS -  
PREPARE SUBSTRATE WITH 650 LT  
LIQUID ADHESIVE OR CALIFORNIA  
SEALANT AT A RATE OF 250 - 300 SF/GAL  
OR 650 WB LIQUID ADHESIVE AT A RATE  
OF 350 - 400 SF/GAL

3/4" FILLET OF DETAIL SEALANT PW  
OR LM-95 APPLIED TO INSIDE  
CORNERS VERTICALLY AND  
HORIZONTALLY TO RAW CONCRETE -  
ALLOW DETAIL SEALANT PW TO  
CURE FOR 2 HOURS PRIOR TO  
SHEET APPLICATION

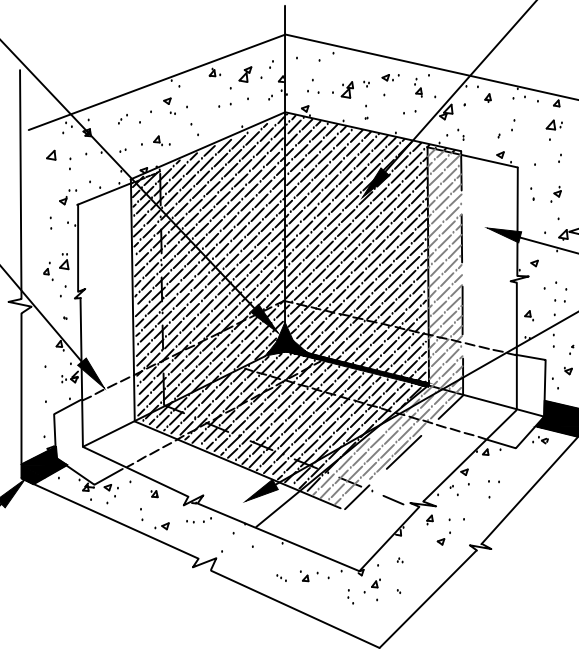

PIECE OF PRM CUT AND FIT TO  
CORNER - APPLIED OVER  
CONCRETE PREPARED WITH 650  
LT LIQUID ADHESIVE OR  
CALIFORNIA SEALANT AT A RATE  
OF 250 - 300 SF/GAL OR 650 WB  
LIQUID ADHESIVE AT A RATE OF  
350 -400 SF/GAL

PRM APPLIED OVER CONCRETE  
PREPARED WITH 650 LT LIQUID  
ADHESIVE OR CALIFORNIA SEALANT  
AT A RATE OF 250 - 300 SF/GAL OR  
650 WB LIQUID ADHESIVE AT A RATE  
OF 350 -400 SF/GAL

## PRM13 SECTION @ FIELD FORMED SELF ADHERED INSIDE CORNER

**SPECIAL NOTE: IF ADHESIVE IS REQUIRED FOR  
SEAMS OR ENDLAPS DO NOT USE 650 WB  
LIQUID ADHESIVE**

© POLYGUARD PRODUCTS, INC.  
MATERIALS SEPARATED FOR CLARITY