

FIELD PRM ROUGH FIT AROUND PENETRATION AND ONTO SUBSTRATE PREPARED WITH 650 LT LIQUID ADHESIVE OR CALIFORNIA SEALANT AT A RATE OF 250 - 300 SF/GAL OR 650 WB LIQUID ADHESIVE AT A RATE OF 350 - 400 SF/GAL


POLYFLOW 15 OR 15P SHEET MOLDED DRAIN - OPTIONAL

TIGHT FITTING TARGET PATCH OF 650 MEMBRANE TO CREATE A TIGHT SEAL AROUND PENETRATION

SECURED PENETRATION MEMBER CLEAN AND ABRASE 3" OF THE BASE OF PENETRATION SIDEWALLS

LM-95 OR DETAIL SEALANT PW APPLIED 6" ONTO RAW CONCRETE AND 3" ONTO ABRASED PENETRATION.

LM-95 LIQUID MEMBRANE OR DETAIL SEALANT PW APPLIED TO TERMINAL EDGES OF TARGET PATCH

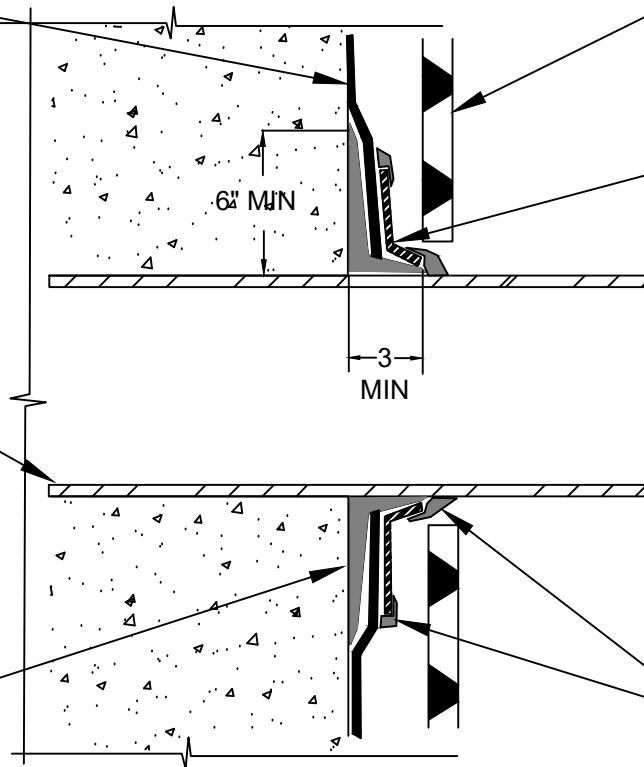

PMR15 SECTION @ VERTICAL WALL PENETRATION WATERPROOFING

SPECIAL NOTE: IF ADHESIVE IS REQUIRED FOR SEAMS OR ENDLAPS DO NOT USE 650 WB LIQUID ADHESIVE

© POLYGUARD PRODUCTS, INC.
MATERIALS SEPARATED FOR CLARITY